



J. M. Engineering Co.

A collage of images related to engineering and manufacturing, including a blue and white airplane, various colored heat shrink sleeves, rolls of yellow and green sleeves, a circuit board, and wind turbines. A yellow square is positioned behind the 'PRODUCTS' text.

PRODUCTS

A light gray world map is visible in the background of the central section.

Heat Shrink Sleeves

Single Wall Heat Shrink Sleeves



Visit Us

Manhar Bldg., 3rd Floor, 177,
Lohar Chawl, Mumbai –
400002, Maharashtra (INDIA)




Email Us

info@jmenggco.in



Call Us

T: +91-22-2206 1671
F: +91-22-2209 0291

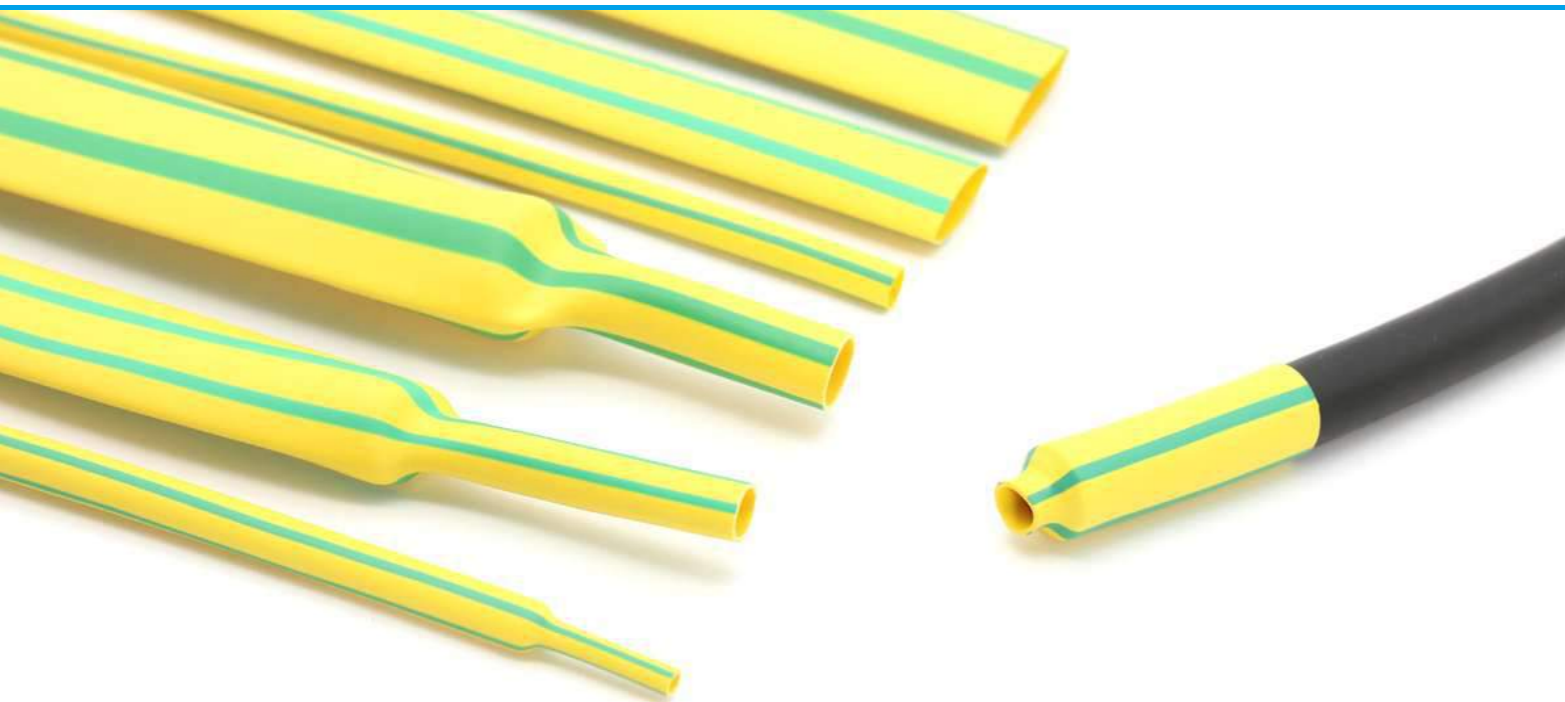

RSFR-(2X,3X) YG

Yellow/Green Stripped Thin Wall Cross-linked Polyolefin Heat Shrink Tubing

Yellow/Green stripped,flexible,flame-retardant.



Features

- Stripped color combination designates international electrical grounding
- Flame retardant
- Flexible
- Resists common fluids and solvents
- Continuous operating temperature:-55 - 125
- Shrink Temperature:90



Dimensions

RSFR-(2X)YG

Size (mm)	Expanded	After Recovery		ROUND/FLAT	Standard Package M/Spool
	Internal Diameter Min(mm)	Internal Diameter Max(mm)	Wall Thickness mm		
1.0	1.5±0.3	0.7	0.28±0.10	Round	200
1.5	2.0±0.3	0.9	0.30±0.10	Round	200
2.0	2.5±0.3	1.0	0.35±0.10	Round	200
2.5	3.0±0.3	1.3	0.36±0.10	Round	200
3.0	3.5±0.4	1.5	0.38±0.10	Round	200
3.5	4.0±0.4	1.8	0.40±0.10	Round	200
4.0	4.5±0.4	2.0	0.45±0.10	Round	200
4.5	5.0±0.4	2.3	0.45±0.10	Round	100
5.0	5.5±0.4	2.5	0.45±0.10	Round	100
6.0	6.5±0.4	3.0	0.50±0.10	Round	100
7.0	7.5±0.4	3.5	0.50±0.10	Flat	100
8.0	8.5±0.5	4.0	0.55±0.10	Flat	100
9.0	9.5±0.5	4.5	0.55±0.10	Flat	100
10.0	10.5±0.5	5.0	0.55±0.10	Flat	100
11.0	11.5±0.5	5.5	0.60±0.10	Flat	100
12.0	12.5±0.5	6.0	0.60±0.10	Flat	100
13.0	13.5±0.5	6.5	0.60±0.10	Flat	100
14.0	14.5±0.5	7.0	0.65±0.10	Flat	100
15.0	15.5±0.6	7.5	0.70±0.10	Flat	100
16.0	17.0±0.6	8.0	0.70±0.10	Flat	100
17.0	17.5±0.6	8.5	0.70±0.10	Flat	100
18.0	19.0±0.7	9.0	0.70±0.15	Flat	100
20.0	22.0±0.7	10.0	0.75±0.15	Flat	100
22.0	24.0±0.7	11.0	0.80±0.15	Flat	100
25.0	26.0±0.7	12.5	0.90±0.15	Flat	50
28.0	29.0±0.7	14.0	0.90±0.15	Flat	50
30.0	31.5±0.7	15.0	0.95±0.15	Flat	50
35.0	36.5±0.7	17.5	0.95±0.15	Flat	50
40.0	41.5±0.7	20.0	1.00±0.20	Flat	50
45.0	46.0±0.7	22.5	1.00±0.20	Flat	25
50.0	51.0±0.7	25.0	1.00±0.20	Flat	25
60.0	60.0	30.0	1.10±0.20	Flat	25
70.0	70.0	35.0	1.20±0.20	Flat	25
80.0	80.0	40.0	1.30±0.20	Flat	25
90.0	90.0	45.0	1.50±0.20	Flat	25
100.0	100.0	50.0	1.65±0.20	Flat	25
120.0	120.0	60.0	1.70±0.20	Flat	15
150.0	150.0	75.0	1.70±0.20	Flat	15
180.0	180.0	90.0	1.75±0.20	Flat	15

RSFR-(3X)YG

Size (mm)	Expanded	After Recovery		Round/Flat	Standard Package M/Spool
	Internal Diameter Min(mm)	Internal Diameter Max(mm)	Wall Thickness mm		
3.2	3.2	1.0	0.55± 0.15	Round	200
4.8	4.8	1.5	0.60± 0.15	Round	100
6.4	6.4	2.0	0.65± 0.15	Round	100
9.5	9.5	3.0	0.75± 0.15	Flat	50
12.7	12.7	4.0	0.75± 0.20	Flat	50
19.1	19.1	6.0	0.85± 0.20	Flat	50
25.4	25.4	8.0	1.00± 0.20	Flat	50
39	39	13.0	1.50± 0.20	Flat	50

Technical Data

Property	Test Method	Standard	Typical Performance
Tensile strength(MPa)	ASTM D2671	10.4	11.5
Elongation(%)	ASTM D2671	300	450
Tensile strength after aging (MPa)	UL224 158 X168hr	7.3	8.5
Elongation after aging(%)	UI224 158 X168hr	200	350
Dielectric strength(kV/mm)	IEC 60243	15	17.5
Volume resistivity(.cm)	ASTM D876	1X10 ¹⁴	2.5X10 ¹⁴