



J. M. Engineering Co.

PRODUCTS

Heat Shrink Sleeves

Single Wall Heat Shrink Sleeves



Visit Us

Manhar Bldg., 3rd Floor, 177,
Lohar Chawl, Mumbai –
400002, Maharashtra (INDIA)



Email Us

info@jmenggco.in



Call Us

T: +91-22-2206 1671
F: +91-22-2209 0291



Dimension

Size		As Supplied	After Recovery		Standard Package
Inch	mm	Internal Diameter Min(mm)	Internal Diameter Max(mm)	Wall Thickness Nom(mm)	M/spool
3/64	0.6	0.9± 0.2	0.50	0.22	200
	0.8	1.1± 0.2	0.65	0.28	200
1/16	1.0	1.5± 0.2	0.85	0.32	200
	1.5	2.0± 0.2	1.00	0.35	200
3/32	2.0	2.5± 0.2	1.30	0.38	200
	2.5	3.0± 0.2	1.50	0.40	200
1/8	3.0	3.5± 0.2	1.80	0.42	200
	3.5	4.0± 0.2	2.00	0.50	200
	4.0	4.5± 0.2	2.30	0.55	200
3/16	4.5	5.0± 0.2	2.5	0.55	100
	5.0	5.5± 0.2	3.0	0.55	100
1/4	6.0	6.5± 0.2	3.5	0.60	100
	7.0	7.5± 0.3	4.0	0.60	100
5/16	8.0	8.5± 0.3	4.5	0.60	100
	9.0	9.5± 0.3	5.0	0.60	100
3/8	10.0	10.5± 0.3	5.5	0.60	100
	11	11.5± 0.3	6.0	0.65	100
	12	12.5± 0.3	6.5	0.65	100
1/2	13	13.5± 0.3	7.0	0.70	100
	14	14.5± 0.3	7.5	0.70	100
	15	15.5± 0.4	8.0	0.70	100
5/8	16	16.5± 0.4	8.5	0.80	100
	17	17.5± 0.4	9.0	0.80	100
3/4	18	19.0± 0.5	10.0	0.80	100
	20	21.0± 0.5	11.0	0.90	100
	22	23.0± 0.5	12.5	0.90	50
1	25	26.0± 0.5	14.0	0.95	50
	28	29.0± 0.5	15.0	1.00	50
1 - 1/4	30	31.5± 1.0	17.5	1.00	50
	35	36.5± 1.0	20.0	1.00	50
1 - 1/2	40	41.5± 1.0	22.5	1.00	50
	45	46.0± 1.0	25.0	1.00	25

RSFR-105

Economical, non self-extinguishing

Halogen free, heat shrink tubing



Features


Flexible

Halogen free

Temperature:-55 to 105

Shrink temperature: 105

RoHS and Sony compliant

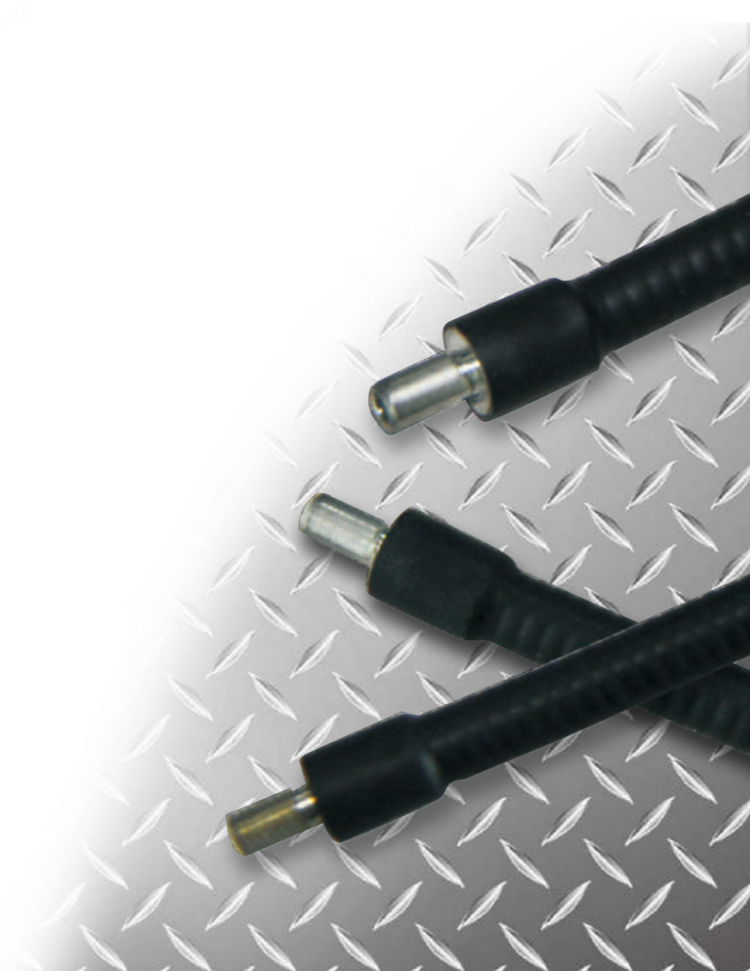

Technical Data

Property	Test Method	Typical Performance
Tensile strength(MPa)	ASTM D 2671	10.4
Ultimate elongation(%)	ASTM D 2671	200
Voltage withstand	2500V, 60s	No breakdown
Volume resistivity ·cm)	ASTM D 876	10 ¹⁴